

Introduction

This document provides information on axle and suspension applications in Volvo vehicles.

Note: We have attempted to cover as much information as possible. However, this information does not cover all the unique variations that a vehicle may present. Note that illustrations are typical but may not reflect all the variations of assembly.

All data provided is based on information that was current at time of release. However, **this information is subject to change without notice.**

Please note that no part of this information may be reproduced, stored, or transmitted by any means without the express written permission of Volvo Trucks North America.

Contents:

"VNL Front Axle Options", page 2

"Rear Suspension", page 4

"Volvo Group GRAS (Global Rear Air Suspension) Suspension (VGR)", page 4

"Volvo Group VOAS (Volvo Optimized Air Suspension) Suspension (VAS)", page 6

"HENDRICKSON HAS (Hendrickson Air Suspension) Suspension (HAS)", page 8

"Auxiliary Pusher Axle Manufacture, Link (PAM-LINK AUX)", page 8

"Specifications", page 9

"Air System", page 14

"Air Suspension Ride Height", page 18

"Pinion angle", page 23

"Rear suspension torque specifications", page 26

"Volvo Group GRAS Suspension (RSI-VGR)", page 26

"Volvo Group VOAS Suspension (RSI-VAS)", page 32

"Hendrickson HAS Suspension (RSI-HAS)", page 35

"PAM-LINK (Auxiliary Pusher Axle Manufacture, Link)", page 36

"Rear Axle Literature", page 37

Front Axle

VNL Front Axle Options

Manufac- turer	Axle Model	Axle Drop	Weight Rating	Hub Type	Sales Code	SWB (<190) Inner Wheel- cut	SWB (<190) Outer Wheel- cut	MWB (191– 230) In- ner Wheel- cut	MWB (191– 230) Out- er Wheel- cut	LWB (<231) Inner Wheel- cut	LWB (<231) Outer Wheel- cut																						
Meritor (FATYP- ME)	MFS12- E122	3.5"	12,000 lbs.	Basic	370508	50	35.8	50	38.6	50	38.6																						
				Basic																													
				Basic																													
				Basic																													
		3.5"	12,500 lbs.	370509	50	31.5	45	35.3	45	35.3																							
											Basic																						
											Basic																						
											Basic																						
	MF- S13122	3.5"	13,200 lbs.	370510	50	31.5	45	35.3	45	35.3																							
											Basic																						
											Basic																						
											Basic																						
Dana (FA- TYPM- D)	E-1252IR	3.5" and 3.74"	12,000 lbs.	Basic	370505	50	34.9	50	37.7	50	37.7																						
		3.5" and 3.74"	12,500 lbs.	Basic	370506																												
	E- 1322IL	3.5", 3.74" and 5.0"	13,200 lbs.	Basic	370507							VOLVO (FATYPM- V)	VF13	3.5"(- Dou- ble Drop)	12,000 lbs.	Basic and Unitized	370501	50	34.7	50	36.6	50	37.9	12,500 lbs.	370502	13,200 lbs.	370503	14,600 lbs.	370504	VF14			
VOLVO (FATYPM- V)	VF13	3.5"(- Dou- ble Drop)	12,000 lbs.	Basic and Unitized	370501	50	34.7	50	36.6	50	37.9																						
			12,500 lbs.		370502																												
	13,200 lbs.		370503																														
	14,600 lbs.		370504																														
	VF14																																

Notes:

- The Dana Spicer Axle is a CE options.
- The Dana Spicer Axle can only be used with the VOAS Rear Suspension.

Notes

Rear Suspension

The ECS (Electronically Controlled Suspension) system is an electronically controlled leveling system for heavy-duty trucks. The ECS system uses the electronic level sensors, pressure sensors, solenoid valves and air bellows to adjust the height and axle load on the vehicle.

The level of the vehicle is measured by the level sensors, which provide information to the ECS system. The ECS system compares the current level with expected values and adjusts the level by inflating or deflating air from the suspension air springs. This provides greater driver comfort and equipment protection off-highway, where other air suspensions cannot be used.


Vehicles equipped with an air ride suspension absorb the variations in road conditions with an air spring and the assistance of a Z shaped leaf spring and air spring members. The air suspension provides a smooth ride whether the vehicle is loaded or unloaded. It also reduces wear on tires and chassis.

The air springs are mounted to the Z leaf springs via a crossmember and attached to the frame on top. The Z spring mounts to the axle housing, spring hanger bracket and the radius leaf spring.

For GRAS suspension, the air spring members are used and they are mounted to the air springs, the axle and the reaction rods.


Volvo Group GRAS (Global Rear Air Suspension) Suspension (VGR)

Rear suspension installation – Volvo Group GRAS Suspension (RSI-VGR) 6*4

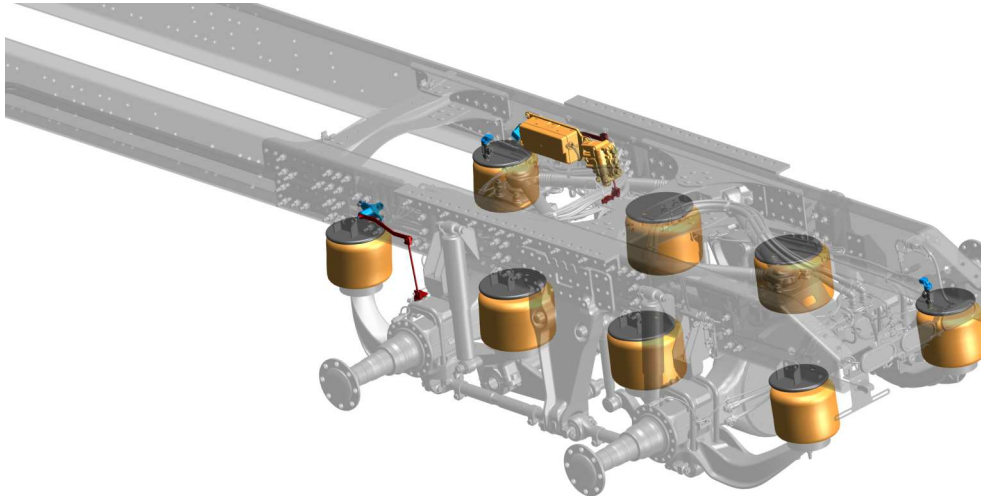


T7201416

Rear suspension installation – Volvo Group GRAS Suspension (RSI-VGR) 6*2

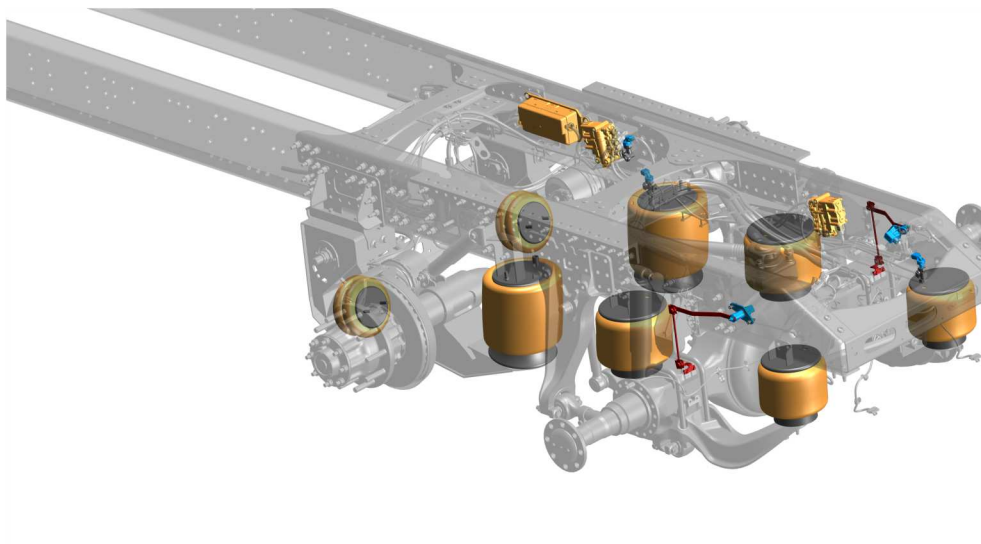

T7201417


Rear suspension installation – Volvo Group GRAS Suspension (RSI-VGR) 4*2

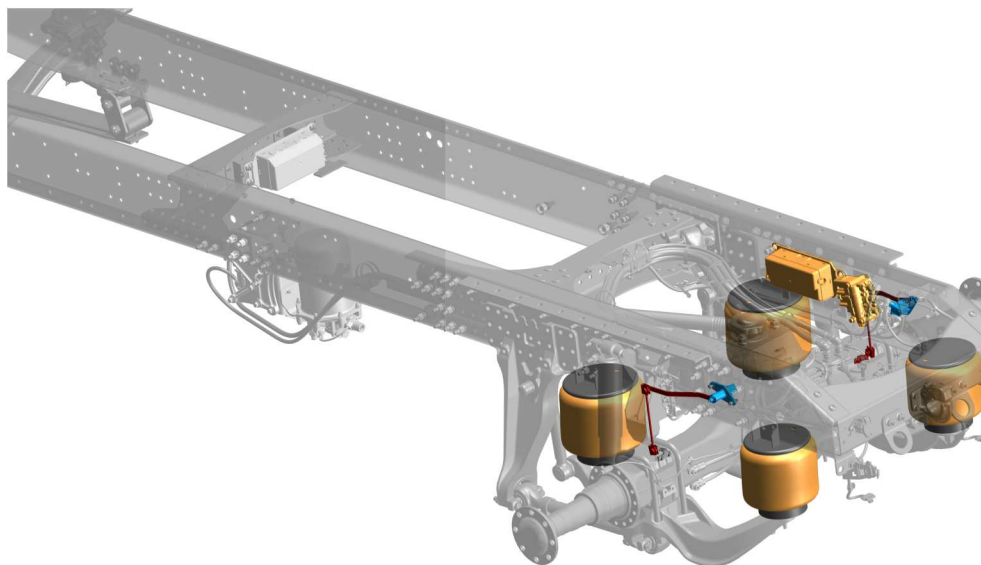

T7201418


Volvo Group VOAS (Volvo Optimized Air Suspension) Suspension (VAS)

Rear suspension installation – Volvo Group VOAS Suspension (RSI-VAS) 6*4

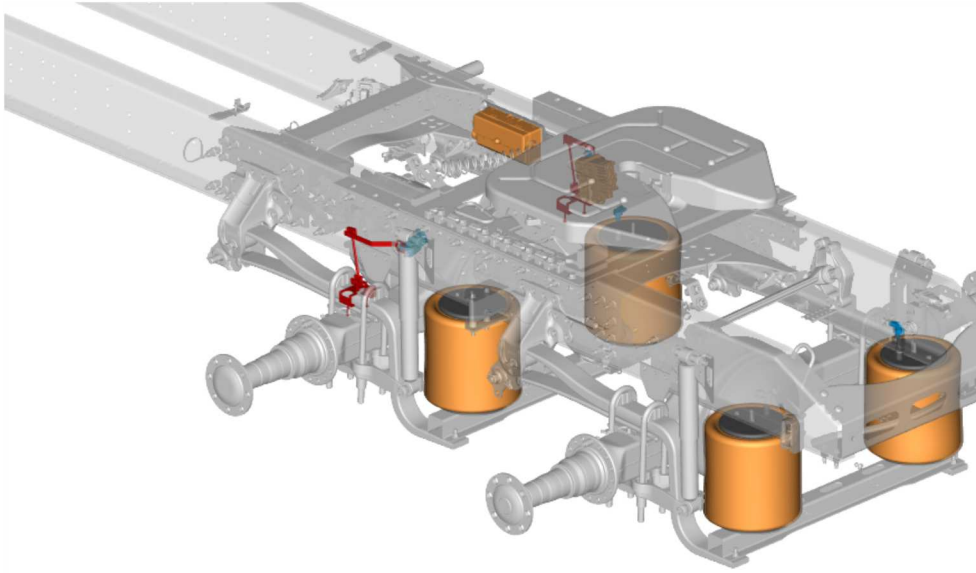


T7201420

Rear suspension installation – Volvo Group VOAS Suspension (RSI-VAS) 6*2

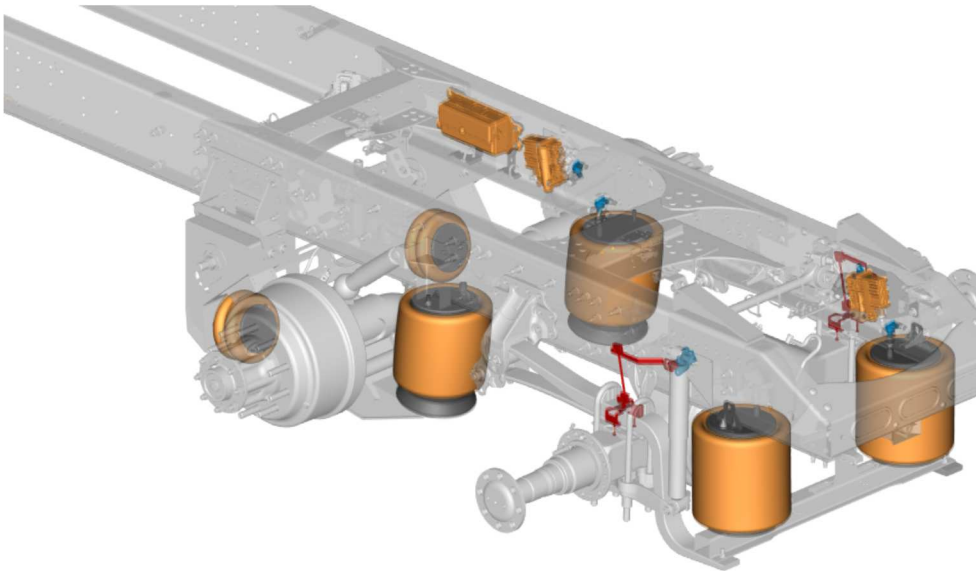

T7201421

Rear suspension installation – Volvo Group VOAS Suspension (RSI-VAS) 4*2

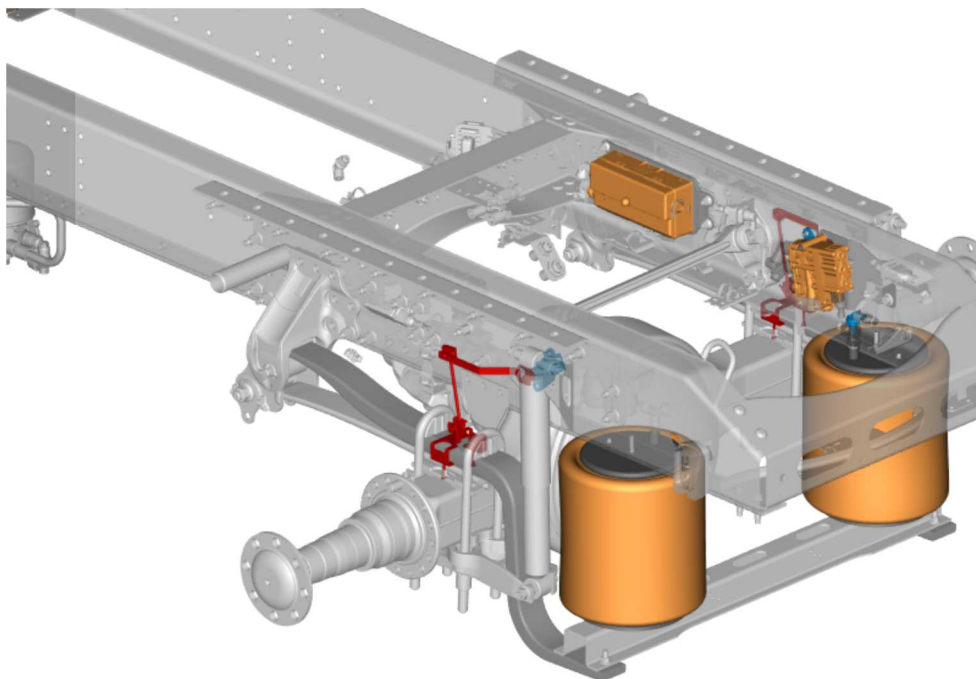

T7201422

The design of the Air-Ride Suspension has been refined by Volvo Trucks North America. The result of this refinement process is the VOLVO Optimized Air Suspension. This new suspension is a rear air suspension with improved ride characteristics and increased durability.




CAUTION

The VOLVO Optimized Air Suspension is set at the factory. Changing the ride height will affect the driveshaft angles and may cause driveline vibration and/or shorten component life.

Ride height adjustments must be performed in accordance with all documented service procedures.

HENDRICKSON HAS (Hendrickson Air Suspension) Suspension (HAS)

Rear suspension installation – Hendrickson HAS Suspension (RSI-HAS) 6*4

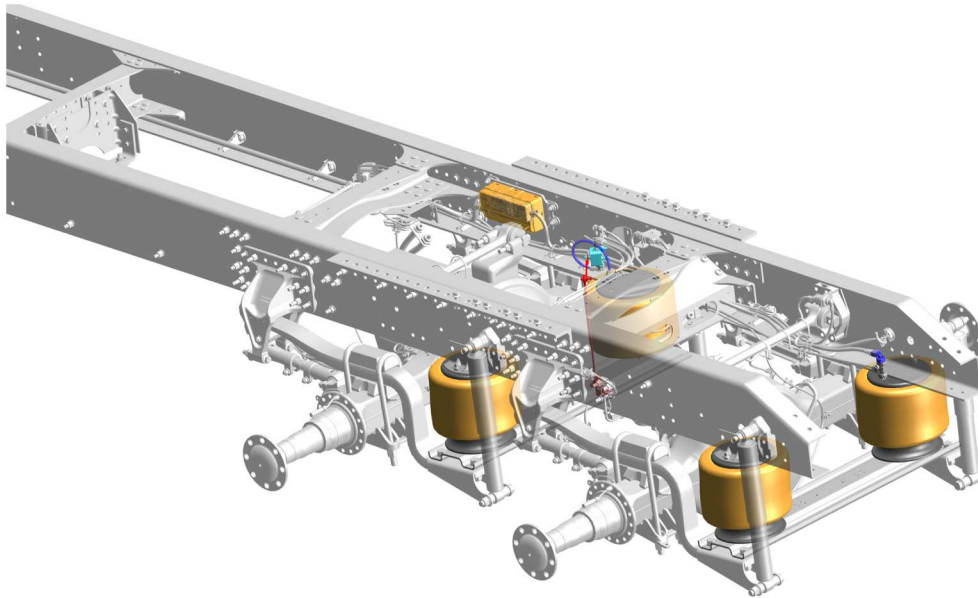


T7201430

The Hendrickson HAS air suspension is designed for up to 25% off-highway use. It features thicker main support members and premium longitudinal torque rods to handle rough off-highway bumps and shocks. It also is approved for use with an auxiliary lift axle.

Auxiliary Pusher Axle Manufacture, Link (PAM-LINK AUX)

Rear Suspension Installation – PAM-LINK (Auxiliary Pusher Axle Manufacture, Link) 6*2 (RSI-VGR / RSI-VAS)

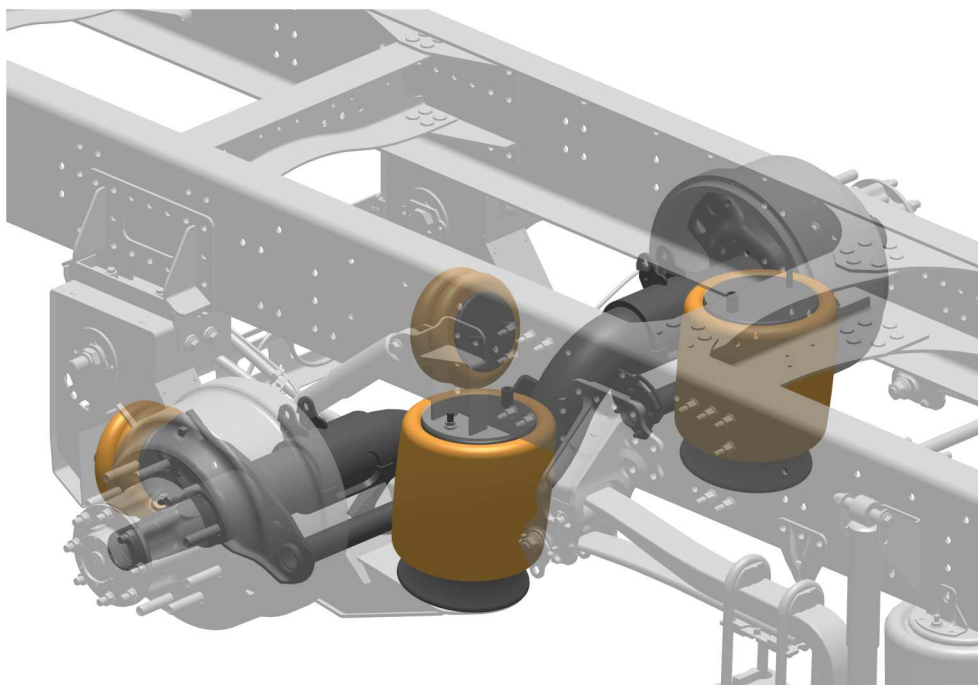

T7206700

Specifications

Rear suspension installation – Volvo Group GRAS suspension (RSI-VGR)

Model	4*2		6*2			6*4			
Capacity (lb)	23,000		23,000			46,000			
Load Distribution	NA		50-50			50-50			
Spring Type	Air								
Transverse Torque Rod	STANDARD								
Rear Shock Absorbers	STANDARD								
GCW	52 Tons	57 Tons	45 Tons	52 Tons	57 Tons	73 Tons	73 Tons	36 Tons	57 Tons
GVWR	35920 lbs	54320 lbs	32000 lbs	35920 lbs	54320 lbs	59220 lbs	58620 lbs	52350 lbs	52350 lbs
Vehicle Models	VNL								
Axle Model	S23-175	17XHE	RS-23-160/161, MS-23-16*	S23-175	17XHE	RT-46-164EH	RT-46-160/164 MT-46-16*	MT-40-14XHE	MT-40-A14*C, MT-40-A14*D, MT-40-A14*G, MT-40-A14*H

Rear suspension installation – Volvo Group VOAS suspension (RSI-VAS)


Model	4*2		6*2	6*4		
Capacity (lb)	20,000	23,000	23,000	38,000	40,000	46,000
Load Distribution	NA		50-50	50-50		
Spring Type	Air					
Transverse Torque Rod	STANDARD					
Rear Shock Absorbers	STANDARD					
GCW	45, 52, 47 Tons			36, 57, 50 Tons		73, 36, 57 Tons
GVWR	32000, 35920, 54320 lbs			52350 lbs		59220, 58620, 52350 lbs
Vehicle Model	VNL					
Axle Models	RS-23-160/161,MS-23-16*, S23-175, 17XHE			MT-40-14XHE, MT-40-A14*C, MT-40-A14*D, D40-155 ADVANTEK, D40-156 ADVANTEK		RT-46-164EH, RT-46-160/164 MT-46-16*, MT-40-14XHE, MT-40-A14*C, MT-40-A14*D, MT-40-A14*G, MT-40-A14*H

Rear suspension installation – Hendrickson HAS suspension (RSI-HAS)

Model	6*4
Capacity (lb)	46,000
Load Distribution	50-50
Spring Type	Air
Transverse Torque Rod	STANDARD
Rear Shock Absorbers	STANDARD
GCW	73 Tons
GVWR	58620 lbs
Vehicle Models	VNL
Axle Models	RT-46-160/164 MT-46-16*

Notes

Hendrickson HAS Air Suspension

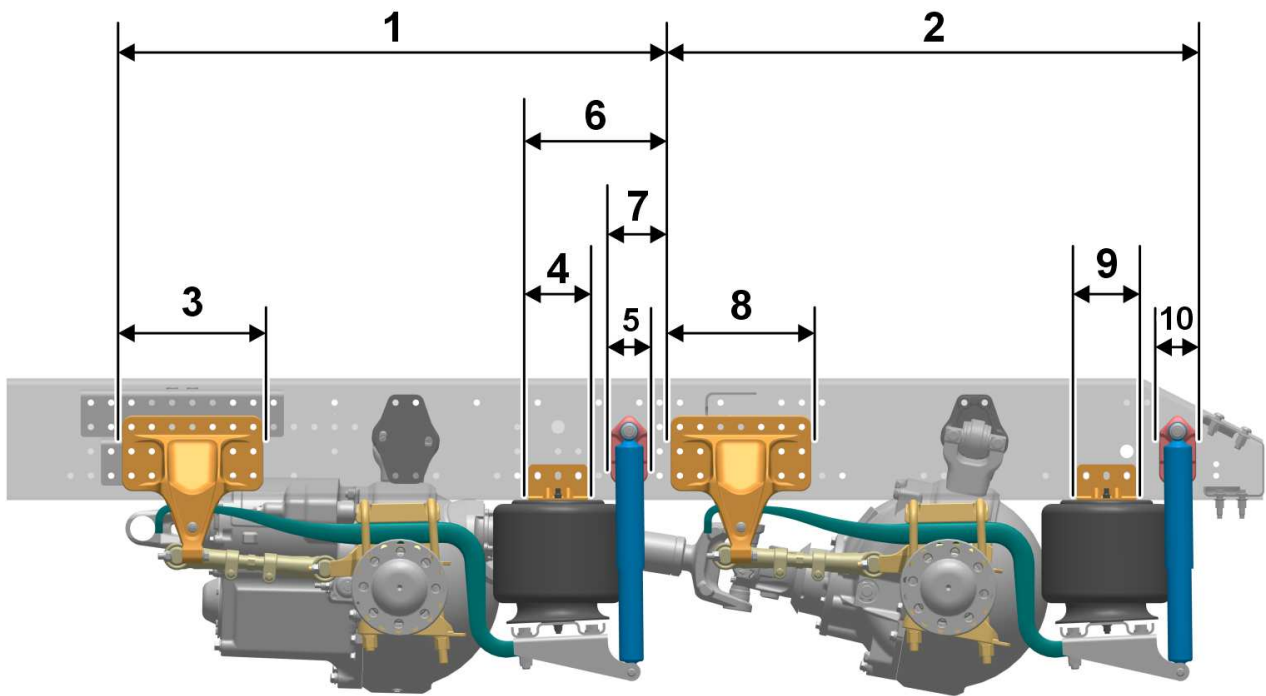

T7204985

Hendrickson HAS Air, Side view

Bogie Spread: HAS Air, Side View

SL No.	Bogie Spread, HAS, mm (in.)	
	1350 (53)	1500 (59)
1	1350	1500
2	1291	1291
3	346	346
4	146	146
5	91	91
6	350	500
7	150	300
8	346	346
9	146	146
10	91	91

Notes

Center Bushings

The use of rubber or bronze bushings is dependent on a variety of factors dictated by the operating conditions and geographic location of the vehicle. These factors can be determined only by the experience of the operator. In the absence of this experience, use these general guidelines:

Guidelines for Rubber or Bronze Bushing Applications

- A** 34,000 Rubber — standard 34K bushing offered by the truck manufacturer. It is an economical bushing, requiring no maintenance and providing satisfactory life for a variety of applications.
- B** 34,000 Bronze — this bushing can provide extended service life for tight cornering conditions. Proper preventive maintenance is required.
- C** 38,000 Rubber — this bushing, although no longer used for new vehicle production, is a highly economical 38K - rated bushing. It requires no maintenance and provides satisfactory life for its application.
- D** 40–46,000 Rubber — this high confinement bushing is the standard 40K bushing offered. It provides excellent service life for a variety of applications without required maintenance. Also used up to 46K with transverse rods.
- E** 8–52,000 Bronze — this is the standard release bushing provided at manufacture. It provides long life in severe service applications, and requires proper preventive maintenance.
- F** 46–52,000 Rubber — this fully bonded bushing requires the use of transverse rods at these ratings. It needs no maintenance, yet provides long life in severe service. Use of this bushing slightly reduces the available diagonal articulation.

Transverse Rod Applications

Transverse rods are mandatory for the following applications:

- All Walking Beam Series Suspensions, up to and including 23,600 kg (52,000 lb) capacity with axle spacing 1524 mm (60 in) or greater.
- All Walking Beam Series Suspensions, up to and including 23,600 kg (52,000 lb) capacity when used on front-end loader refuse packers (except with 40,000 lb suspension with bronze center bushings).
- All Air-Ride Series Suspensions.
- All HN Series Suspensions.
- All Walking Beam Series Suspensions with capacities of 20,000 – 23,600 kgs (44,000 – 52,000 lbs) when using rubber equalizing beam center bushings, regardless of axle spacing.

Transverse rods also are recommended where it is necessary to restrict the lateral movement of axles to prevent interference of tires, brakes, axle housings, and other components with the frame, body, or suspension components. This must be determined by the vehicle manufacturer prior to vehicle assembly.


Note: When transverse rods are used, the equalizing beam center bushing must be rubber. This may require changing from bronze center bushings (which are standard with some suspensions) to maintain the rating. A vehicle equipped with transverse rods may experience some reduction in suspension articulation or increased lateral stiffness and resistance to turning, especially with radial ply tires.

Air System

A height control valve (1) — or leveling valve — regulates the air supply to the air springs. The valve is mounted inside the frame rail with a rod connecting the lever on the valve to air spring support crossbeam (4). Air is supplied to the suspension to the “B” system air tank. As weight is applied to the vehicle, the frame is forced downward so that the rod linkage forces the lever on the height control valve upward, allowing air pressure to flow through the valve and into the air spring.

As weight is removed from the vehicle, the frame rises and the lever on the control valve is pulled down, releasing air from the air spring. A dash-mounted control switch allows the operator to raise or lower the suspension when connecting or disconnecting from a trailer.

For details on switch function, see “Electric Switch Functions”, page 15 .

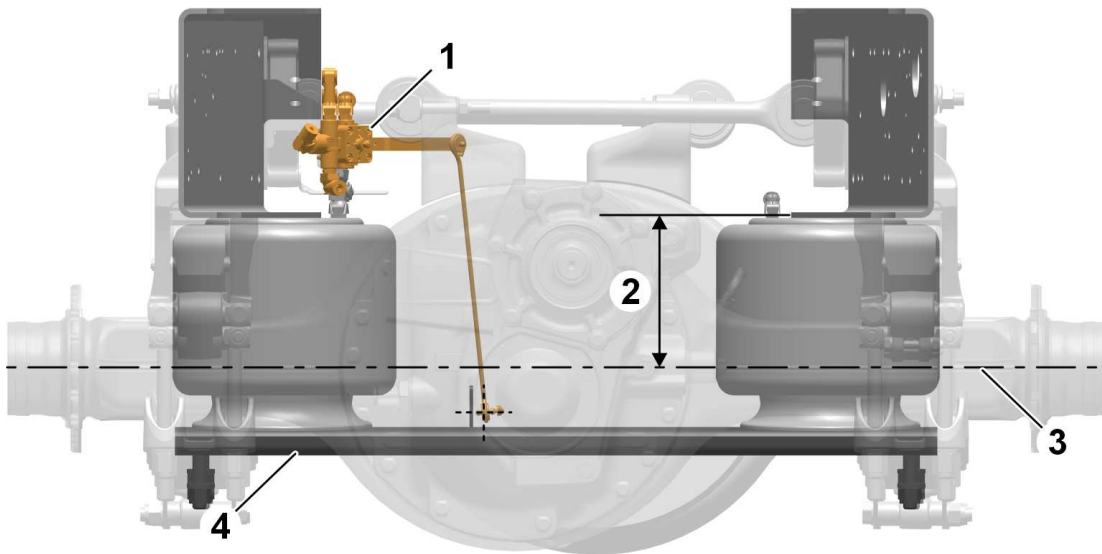


T7201407

Air System

- 1 Leveling Valve
- 2 Ride Height
- 3 Axle Centerline
- 4 Crossbeam (Pedestal Plate)

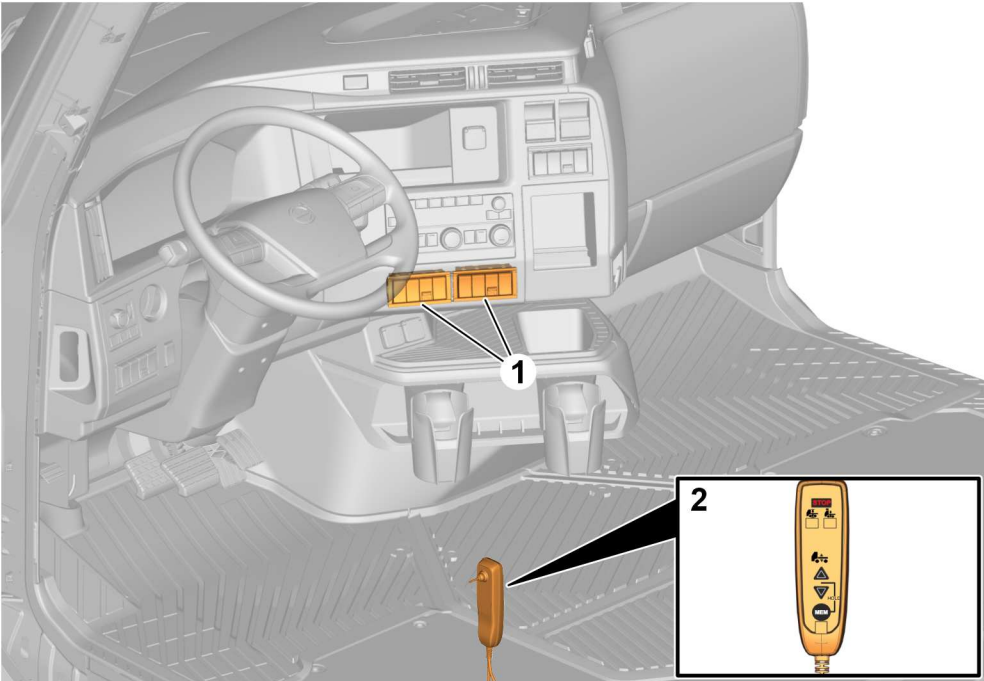

Electric Switch Functions



T3201387


Dash-mounted control switches

The suspension system is controlled by the following switches and remote control (optional):

Switch	Switch Function
 T3201388	Ride height recall switch (Momentary switch)
 T3201389	Ride height recall switch (Stable switch)

A black rectangular switch with two icons: a truck with a raised bed and a truck with a lowered bed. <p>T3201390</p>	Loading level adjustment switch (Momentary switch)
A black rectangular switch with a truck icon and a dump bed icon. <p>T3201409</p>	Air suspension dump switch
A black rectangular switch with two icons: a truck with a raised bed and a truck with a lowered bed. <p>T3201391</p>	ECS traction mode switch
A black rectangular switch with two icons: a truck with a raised bed and a truck with a lowered bed. <p>T3201392</p>	Alternative load distribution switch

Remote control ECS (Electronically Controlled Suspension) (Optional)

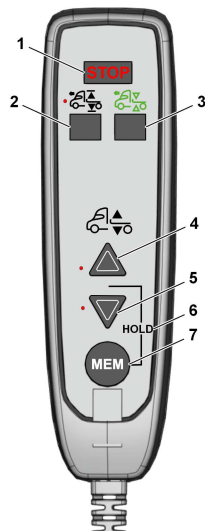

T3201402

- 1 STOP button
- 2 Ride-height adjust button
- 3 Ride-height recall button
- 4 Level raising button
- 5 Level lowering button
- 6 Hold function
- 7 Memory button

By operating the remote control ECS, the ECS system inflates or deflates the suspension air springs to increase or decrease the rear ride height.

Notes

Air Suspension Ride Height

Procedure:



DANGER

Do not attempt to repair or service this vehicle without sufficient training, the correct service literature, and the proper tools. Failure to follow this could make the vehicle unsafe and lead to serious personal injury or death.



CAUTION

The air suspension is set at the factory. Changing the ride height will affect the driveshaft angles and may cause driveline vibration and/or shorten component life. **Ride height adjustments must be performed in accordance with all documented service procedures.**

Note: After a suspension component replacement an alignment should be performed.

Note: Use special tool **J-44544**.

This document provides procedures for adjusting the air suspension.

1. Prepare the vehicle for the ride height calculation as follows:

- Park the vehicle on a level surface (the front wheels must be pointed straight ahead).
- Free and center all suspension joints by slowly moving the vehicle back and forth twice without using the brake. When coming to a complete stop, make sure the brakes (parking and service) are applied.
- Place the gear lever in neutral.
- Chock the wheels.

Note: Measurements must be performed on an unloaded vehicle.

2. Check all tires for proper inflation. Adjust tire air pressure to tire manufacturer's specifications.

3. Using the dash mounted rear suspension air dump switch release the air in the rear air spring, or disconnect the leveling rod from the leveling valve so that the pressure is released from the air springs.



WARNING

Avoid personal injury. BEFORE releasing air pressure from air springs, BE SURE neither your hand nor another persons hand, etc., is in a position where it could be pinched between components when the frame/suspension drops.

4. Start the engine and allow the air system to attain normal operating pressure of 827 kPa (120 psi). Turn off the engine.

5. Fill the rear air springs with air using the dash mounted switch or reconnect the actuator rod to the load leveling valve lever.

Ensure the air system is at normal operating pressure of 827 kPa (120 psi).

6. Measure the size of the frame.


Note: The ride height measurement is dependent on frame size.

7. Measure the distance from the floor to the center of the axle.

8. Measure the distance from the bottom edge of the frame to the floor.

9. The difference in the two measurements is the ride height. Verify that the vehicle is at the correct ride height per Table A.

Ride height

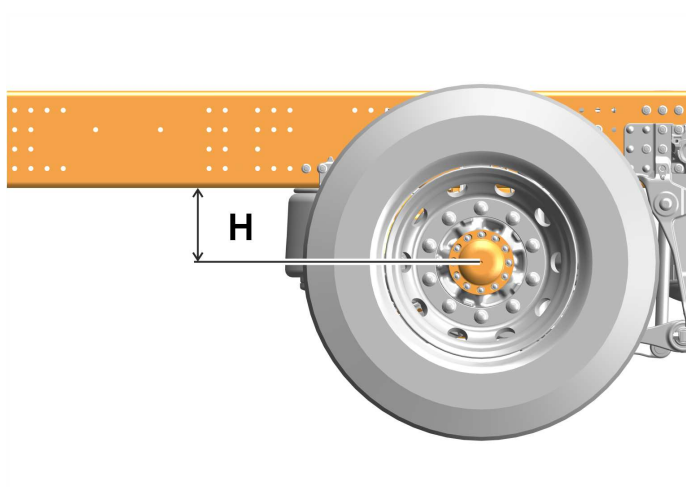


T7206228

H. Ride height

The ride height (H) is measured from the center of the first driving axle hub to the bottom of the frame.

Note: The air springs must be filled to the correct pressure before measuring the ride height.

Procedure to measure ride height

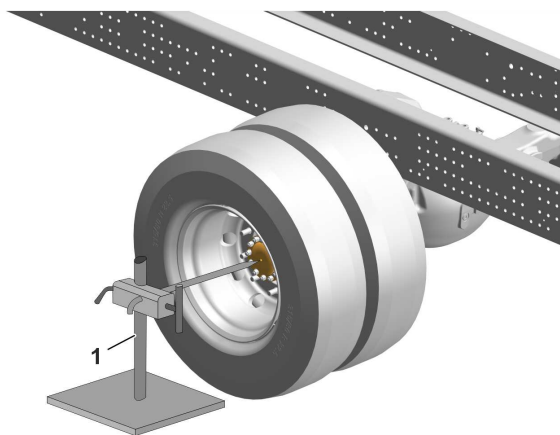


T7206229

1. Tool

Place the tool (1) near the first drive axle and position the pointer to the centre of the axle hub.

Note: The vehicle must be on level ground.

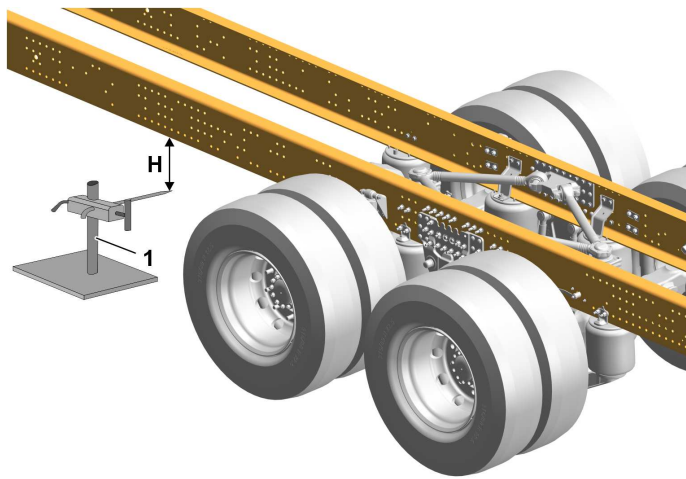

T7206230

H. Ride height
1. Tool

Move and position the tool (1) between the drive axles and below the frame. Measure the ride height (H) from the tip of the pointer to the bottom of the frame.

Table A – Frame Height and Ride Height measurements for **RSI-VGR**, **RSI-VAS** and **RSI-HAS**

Ride height – Volvo Group GRAS Suspension (RSI-VGR)

Rear suspension height (A) variant	Frame height (B) variant	Ride height (H)
		Loaded/Unloaded
RSH-STD	FRAME266	9.33±0.19 in (237±5 mm)
	FRAME300	8.66±0.19 in (220±5 mm)
RSH-HIG	FRAME266	10.51±0.19 in (267±5 mm)
	FRAME300	9.84±0.19 in (250±5 mm)

Ride height – Volvo Group VOAS Suspension (RSI-VAS) (Mechanical controlled)

Rear suspension height (A) variant	Frame height (B) variant	Ride height (H)	
		Loaded	Unloaded
RSH-LOW	FRAME266	6.29±0.19 in (160±5 mm)	6.69±0.19 in (170±5 mm)
RSH-STD	FRAME266	7.59±0.19 in (193±5 mm)	7.99±0.19 in (203±5 mm)
	FRAME300		
RSH-HIG	FRAME266	9.05±0.19 in (230±5 mm)	9.44±0.19 in (240±5 mm)
	FRAME300	8.38±0.19 in (213±5 mm)	8.77±0.19 in (223±5 mm)

Ride height – Volvo Group VOAS Suspension (RSI-VAS) (Electronic controlled)

Rear suspension height (A) variant	Frame height (B) variant	Ride height (H)
		Loaded/Unloaded
RSH-LOW	FRAME266	6.29 in (160 mm)
RSH-STD	FRAME266 FRAME300	7.59 in (193 mm)
RSH-HIG	FRAME266 FRAME300	8.38 in (213 mm)


Ride height – Hendrickson HAS Suspension (RSI-HAS)

Rear suspension height (A) variant	Frame height (B) variant	Ride height (H)	
		Loaded	Unloaded
RSH-STD	FRAME266 FRAME300	8.5 in (215.90 mm)	8.66 in (220.20 mm)
		8.50 in (216 mm)	8.62 in (219 mm)
RSH-HIG	FRAME266 FRAME300	9.5 in (241.30 mm)	9.66 in (245.50 mm)
		9.48 in (241 mm)	9.61 in (244.30 mm)
		9.5 in (241.30 mm)	9.61 in (244.30 mm)

Note: For vehicles equipped with ECS (Electronically Controlled Suspension), the unloaded ride height is the same as the loaded ride height (use the loaded values for a vehicle that is unloaded) because the ECS automatically adjusts the rear ride height.

10. Adjust the ride height (if required).


11. Loosen the fastener securing the load leveling valve to the frame. Use the ride height adjustment socket wrench to adjust the valve so the ride height is within specification. The suspension ride height is changed by turning the load leveling valve clockwise (to lower) or counter-clockwise (to raise). Tighten the nut securing the load leveling valve to the frame to 175 ± 30 Nm (129 ± 22 ft-lb).

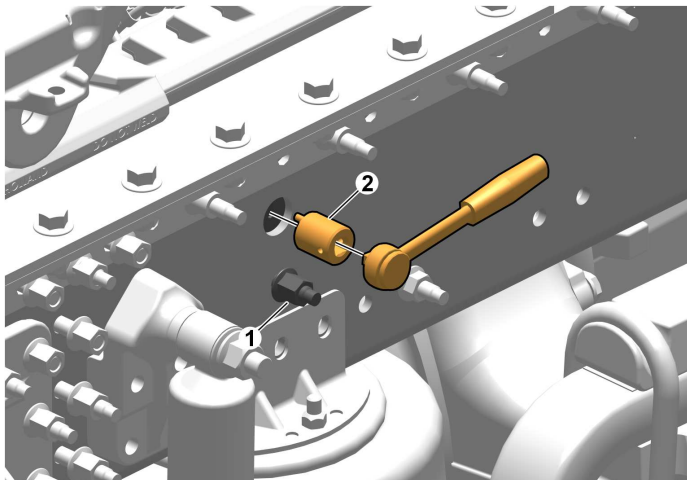

T7201312

- 1 Nut
- 2 **J-44544** tool

- 12. Re-check the ride height to confirm the accuracy of the leveling valve adjustments.
- 13. Using the dash mounted rear suspension air dump switch release the air in the rear air spring, or disconnect the leveling rod from the leveling valve so that the pressure is released from the air springs.

**WARNING**

Avoid personal injury. BEFORE releasing air pressure from air springs, BE SURE neither your hand nor another persons hand, etc., is in a position where it could be pinched between components when the frame/suspension drops.


- 14. Start the engine and allow the air system to attain normal operating pressure of 827 kPa (120 psi). Turn off the engine.
- 15. Fill the rear air springs with air using the dash mounted switch or reconnect the actuator rod to the load leveling valve lever.

Ensure the air system is at normal operating pressure of 827 kPa (120 psi).


- 16. Re-check the ride height.
- If the ride height measurement is not within the specifications. Check the leveling valve and other suspension components for wear or damage.
- 17. Apply the parking brake.
 - 18. Remove the wheel chocks.

Notes

Pinion angle

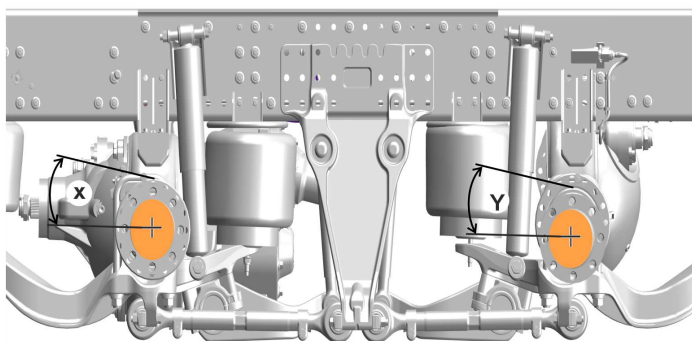

T7201299

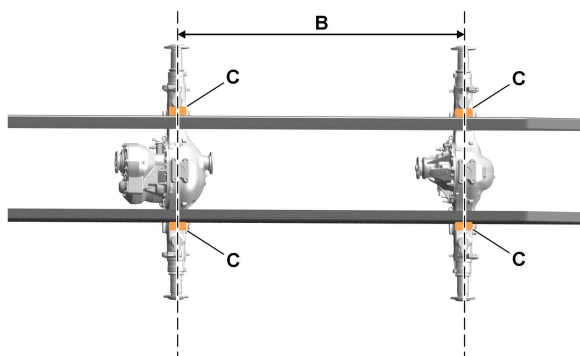

T7201311

X. First drive axle, pinion angle

Y. Second drive axle, pinion angle

B. Bogie spread (distance between the first and second rear drive axles)

C. Area for the axle pinion angle measurement

Rear Suspension Installation – Volvo Group GRAS Suspension (RSI-VGR)

Variant				Pinion angle, first drive axle (X)	Pinion angle, second drive axle (Y)
Rear axle arrangement	Rear axle variant	Rear axle model	Rear suspension height	Loaded/Unloaded	Loaded/Unloaded
RAA11	RSS1052	S23-175	RSH-STD	2.9 ±1°	NA
	RSS1057C	MS-23-17X HE			
RAA21P	RSS1052	S23-175	RSH-STD	2.9 ±1°	NA
	RSS1057C	MS-23-17X HE			
RAA11	RSS1057C	MS-23-17X HE	RSH-HIG	2.65 ±1°	NA
RAA21P	RSS1057C	MS-23-17X HE	RSH-HIG	2.65 ±1°	NA
RAA22	RTS1836A	MT-40-14X HE	RSH-STD	3 ±1°	8 ±1°
			RSH-HIG		
RAA22	RTS1857C	MT-40-14X*C	RSH-STD	2.9 ±1°	3.1 ±1°
	RTS1857G	MT-40-A14*G			
RAA22	RTS1857C	MT-40-14X*C	RSH-HIG	2.9 ±1°	2.9 ±1°
	RTS1857G	MT-40-A14*G			
RAA22	RTS1857D	MT-40-A14*D	RSH-STD	2.9 ±1°	11.15 ±1°
	RTS1857H	MT-40-A14*H			
RAA22	RTS1857D	MT-40-A14*D	RSH-HIG	3.1 ±1°	10.9 ±1°
	RTS1857H	MT-40-A14*H			
	RT2173SM	RT-46-160			
	RT2173M2	RT-46-164			
RAA22	RT2173SM	RT-46-160	RSH-STD	2.9 ±1°	11.1 ±1°
	RT2173M2	RT-46-164			

Rear Suspension Installation – Volvo Group VOAS Suspension (RSI-VAS)

Variant				Pinion angle, first drive axle (X)		Pinion angle, second drive axle (Y)	
Rear axle variant	Rear axle model	Bogie spread variant	Rear suspension height variant	Loaded	Unloaded	Loaded	Unloaded
RTS1857D	MT-40-A14*D	BSR1300	RSH-STD	2.4 ±1°	2.5 ±1°	12.8 ±1°	12.6 ±1°
			RSH-HIG				
RTS1857D	MT-40-A14*D	BSR1500	RSH-STD	2.4 ±1°	2.5 ±1°	11.0 ±1°	10.8 ±1°
			RSH-HIG				
RTS2173SM	RT-46-160	BSR1350	RSH-HIG	3.4 ±1°	3.4 ±1°	11.1 ±1°	11.1 ±1°
RTS2173SM	RT-46-160	BSR1500	RSH-HIG	3.4 ±1°	3.4 ±1°	10.1 ±1°	10.1 ±1°
RTS2173SM	RT-46-160	BSR1300	RSH-STD	2.9 ±1°	2.9 ±1°	12.1 ±1°	12.1 ±1°
RTS2173SM	RT-46-160	BSR1300	RSH-HIG	2.9 ±1°	2.9 ±1°	11.1 ±1°	11.1 ±1°
RSH1857C	MT-40-A14*C	BSR1300	RSH-STD	2.4 ±1°	2.5 ±1°	2.4 ±1°	2.5 ±1°
RSH1857C	MT-40-A14*C	BSR1300	RSH-LOW	2.3 ±1°	2.3 ±1°	5.3 ±1°	5.3 ±1°
RSH1857C	MT-40-A14*C	BSR1500	RSH-STD	2.4 ±1°	2.5 ±1°	2.4 ±1°	2.4 ±1°
RTS1850E	D40-155	BSR1300	RSH-STD	2.9 ±1°	3.0 ±1°	2.9 ±1°	3.0 ±1°
RTS1850F	D40-156						
RTS1836A	MT-40-14X HE	BSR1300	RSH-LOW	2.4 ±1°	2.4 ±1°	8.7 ±1°	8.5 ±1°
RTS1836A	MT-40-14X HE	BSR1300	RSH-STD	2.4 ±1°	2.5 ±1°	9.0 ±1°	8.8 ±1°
RT2173M2	RT-46-164	BSR1300	RSH-HIG	3.4 ±1°	3.4 ±1°	11.6 ±1°	11.6 ±1°
RS1045SM (RAA11/4*2)	RS-23-160/161	NA	NA	2.4 ±1°	2.5 ±1°	NA	NA
RSS1052 (RAA11/4*2)	S23-175	NA	NA	2.4 ±1°	2.4 ±1°	NA	NA
RSS1057C (RAA11/4*2)	MS-23-17X HE						
RS1045SM (RAA21P/6*2)	RS-23-160/161	NA	NA	2.4 ±1°	2.4 ±1°	2.4 ±1°	2.4 ±1°
RSS1052 (RAA21P/6*2)	S23-175	NA	NA	2.4 ±1°	2.5 ±1°	NA	NA
RSS1057C (RAA21P/6*2)	MS-23-17X HE						

Rear Suspension Installation – Hendrickson HAS Suspension (RSI-HAS)


Variant				Pinion angle, first drive axle (X)		Pinion angle, second drive axle (Y)	
Rear axle variant	Rear axle model	Bogie spread variant	Rear suspension height variant	Loaded	Unloaded	Loaded	Unloaded
RTS1857D	MT-40-A14*D	BSR1350	RSH-STD	1.07 ±1°	1.46 ±1°	10.88 ±1°	11.19 ±1°
RTS1857D	MT-40-A14*D	BSR1500	RSH-STD	1.069 ±1°	1.4 ±1°	9.38 ±1°	9.7 ±1°
RT2173SM	RT-46-160	BSR1350	RSH-STD	1.07 ±1°	1.46 ±1°	10.89 ±1°	11.2 ±1°
RT2173SM	RT-46-160	BSR1350	RSH-HIG	1.39 ±1°	1.7 ±1°	10.89 ±1°	11.2 ±1°
RTS2173M2	RT-46-164						
RT2173SM	RT-46-160	BSR1500	RSH-STD	1.069 ±1°	1.4 ±1°	10.89 ±1°	11.2 ±1°
RTS2173M2	RT-46-164						
RT2173SM	RT-46-160	BSR1500	RSH-HIG	1.39 ±1°	1.7 ±1°	8.89 ±1°	9.2 ±1°
RTS2173M2	RT-46-164						
RTS2173M2	RT-46-164	BSR1350	RSH-STD	1.07 ±1°	1.46 ±1°	10.89 ±1°	11.2 ±1°

Rear suspension torque specifications

This publication is intended to acquaint and assist maintenance personnel in the preventive maintenance, service, repair and rebuild of the Volvo suspension system.

Volvo Group GRAS Suspension (RSI-VGR)

Rear Suspension Installation – Volvo Group GRAS Suspension 4*2 (RSI-VGR)

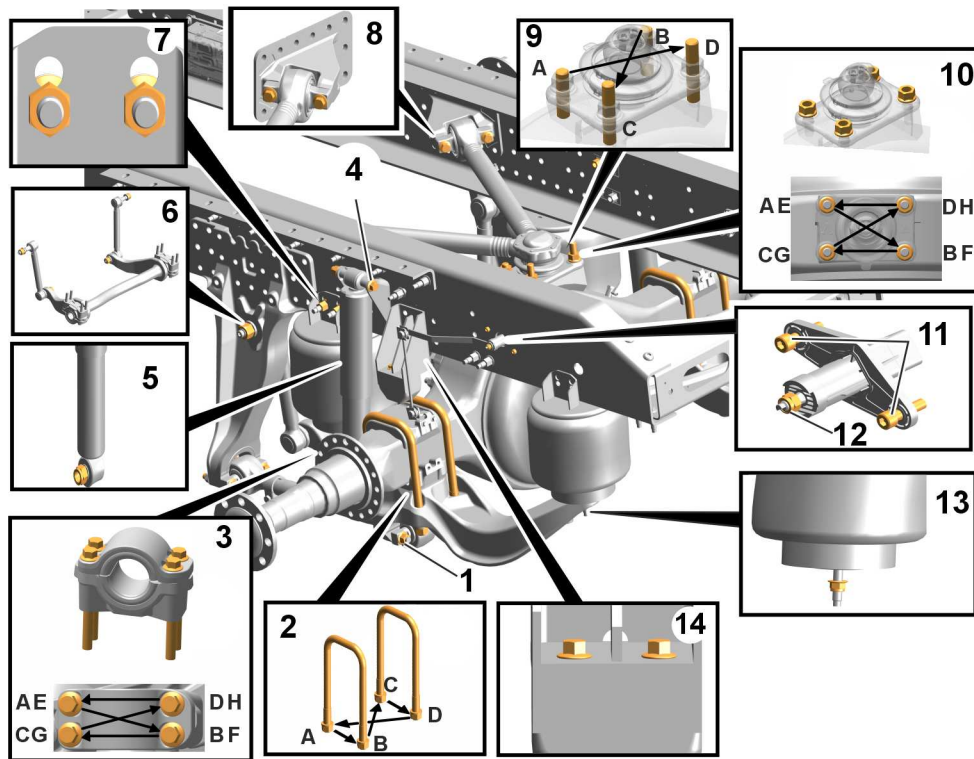


T7202295

Tightening torques

SI no.	Description			Torque in Nm	Torque in ft-lbs
1	Reaction rod, nut			275 ± 45	202.82 ± 33.19
2	U-bolt, nut	1	Step 1	Tightening sequence: A–D	
				10 – 60	7.37 – 44.25
		2	Step 2	Tightening sequence: A–D	
				100 ± 20	73.75 ± 14.75
		3	Step 3	Tightening sequence: A–D	
				150 ± 30	110.63 ± 22.12
4	Step 4	Tightening sequence: A–D			
		660 ± 135	486.79 ± 99.57		
3	Anti-roll bar, support, screw	1	Step 1	Tightening sequence: A-D	
				275 ± 45	202.82 ± 33.19
		2	Step 2	Tightening sequence: E-H	
275 ± 45	202.82 ± 33.19				
4	Shock absorber, nut (upper)			200 ± 40	147.51 ± 29.50
5	Shock absorber, nut (lower)			430 ± 70	317.15 ± 51.62
6	Link arm/stay, nut			390 ± 40	287.64 ± 29.50
7	Air spring, bracket, nut			175 ± 30	129.07 ± 22.12
8	V-stay, bracket, screw			275 ± 45	202.82 ± 33.19
9	V-stay, stud			Tightening sequence: A–D	
				90 ± 10	66.38 ± 7.37
10	V-stay, nut	1	Step 1	Tightening sequence: A–D	
				310 ± 35	228.64 ± 25.81
		2	Step 2	Tightening sequence: E-H	
310 ± 35	228.64 ± 25.81				
11	Level sensor, chassis, nut			24 ± 4	17.70 ± 2.95
12	Level sensor, arm, nut			15 ± 3	11.06 ± 2.21
13	Air spring, nut			140 ± 25	103.25 ± 18.43
14	Bump stop, screw			50 ± 12	36.87 ± 8.85

Rear Suspension Installation – Volvo Group GRAS Suspension 6*2 Driving axle (RSI-VGR)

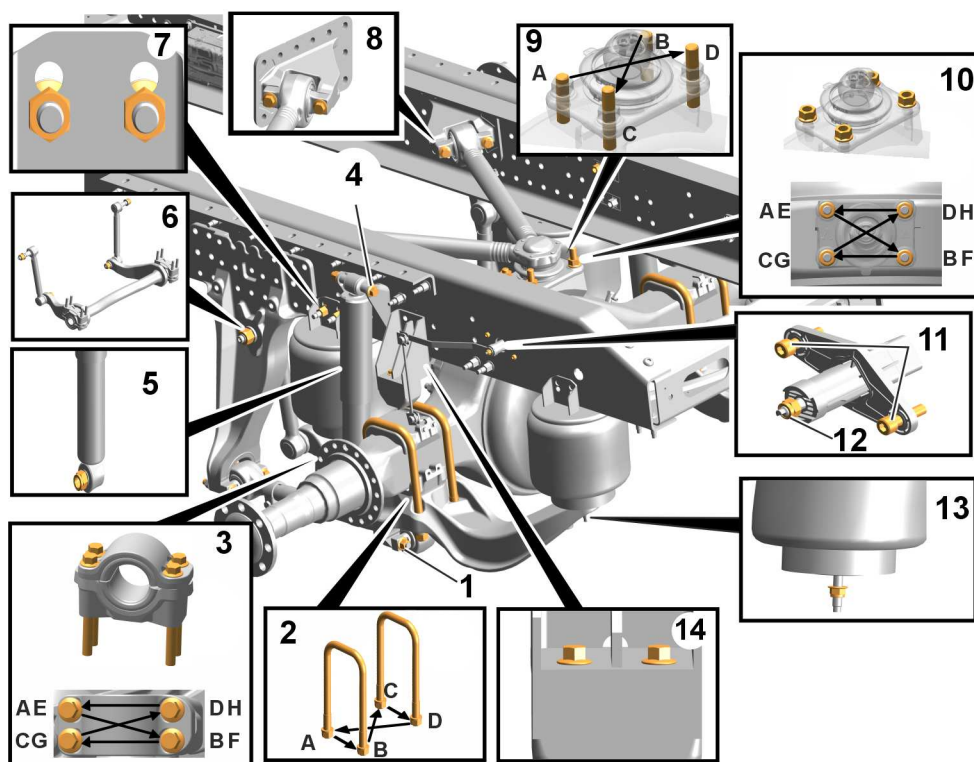


T7202295

Tightening torques

SI no.	Description			Torque in Nm	Torque in ft-lbs
1	Reaction rod, nut			275±45	202.82±33.19
2	U-bolt, nut	1	Step 1	Tightening sequence: A–D	
				10 – 60	7.37 – 44.25
		2	Step 2	Tightening sequence: A–D	
				100±20	73.75±14.75
		3	Step 3	Tightening sequence: A–D	
				150±30	110.63±22.12
		4	Step 4	Tightening sequence: A–D	
				660±135	486.79±99.57
3	Anti-roll bar, support, screw	1	Step 1	Tightening sequence: A-D	
				275±45	202.82±33.19
		2	Step 2	Tightening sequence: E-H	
				275±45	486.79±33.19
4	Shock absorber, nut (upper)			200±40	147.51±29.50
5	Shock absorber, nut (lower)			430±70	317.15±51.62
6	Link arm/stay, nut			390±40	287.64±29.50
7	Air spring, bracket, nut			175±30	129.07±22.12

8	V-stay, bracket, screw			275±45	202.82±33.19
9	V-stay, stud			Tightening sequence: A–D	
				90±10	66.38±7.37
10	V-stay, nut	1	Step 1	Tightening sequence: A–D	
				310±35	228.64±25.81
		2	Step 2	Tightening sequence: E–H	
				310±35	228.64±25.81
11	Level sensor, chassis, nut			24±4	17.70±2.95
12	Level sensor, arm, nut			15±3	11.06±2.21
13	Air spring, nut			140±25	103.25±18.43
14	Bump stop, screw			48±8	35.40±5.90

Rear Suspension Installation – Volvo Group GRAS Suspension 6*4 (RSI-VGR)

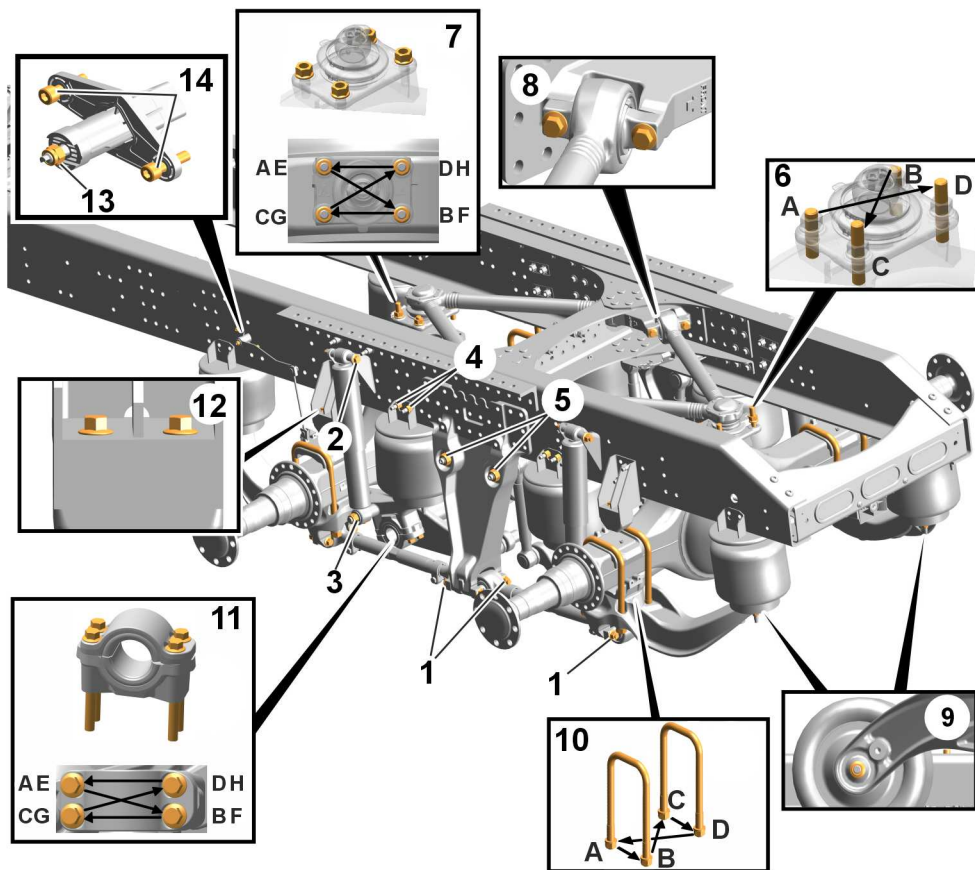

T7202296


Tightening torques

SI no.	Description			Torque in Nm	Torque in ft-lbs
1	Reaction rod, screw			275±45	202.82±33.19
2	Shock absorber, nut (lower)			430±70	317.15±51.62
3	Shock absorber, nut (upper)			200±40	147.51±29.50
4	Air spring, bracket, nut			175±30	129.07±22.12
5	Link arm/stay, nut			390±40	287.64±29.50
6	V-stay, stud			Tightening sequence: A–D	
				90±10	66.38±7.37
7	V-stay, nut	1	Step 1	Tightening sequence: A–D	
				310±35	228.64±25.81
		2	Step 2	Tightening sequence: E–H	
				310±35	228.64±25.81
8	V-stay, bracket, screw			275±45	202.82±33.19
9	Air spring, nut			140±25	103.25±18.43

10	U-bolt, nut	1	Step 1	Tightening sequence: A–D	
				10 – 60	7.37 – 44.25
		2	Step 2	Tightening sequence: A–D	
				100±20	73.75±14.75
		3	Step 3	Tightening sequence: A–D	
				150±30	110.63±22.12
		4	Step 4	Tightening sequence: A–D	
				660±135	486.79±99.57
11	Anti-roll bar, support, screw	1	Step 1	Tightening sequence: A-D	
				27±45	19.91±33.19
		2	Step 2	Tightening sequence: E-H	
				275±45	202.82±33.19
12	Bump stop, screw			48±8	35.40±5.90
13	Level sensor, arm, nut			15±3	11.06±2.21
14	Level sensor, chassis, nut			24±4	17.70±2.95

Volvo Group VOAS Suspension (RSI-VAS)

Rear suspension installation – Volvo Group VOAS Suspension 4*2 (RSI-VAS)

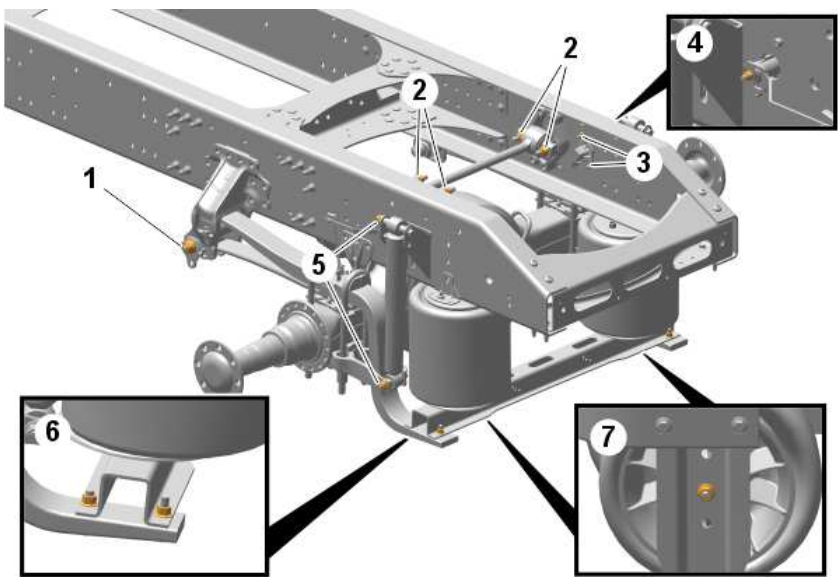


T7206624

Tightening torques

SI no.	Description	Torque in Nm	Torque in ft-lbs
1	Z leaf spring, nut	680±30	501.54±22.12
2	Reaction rod, nut	275±45	202.82±33.19
3	Level sensor, chassis, nut	24±4	17.70±2.95
4	Level sensor, arm, nut	15±3	11.06±2.21
5	Shock absorber, screw	275±45	202.82±33.19
6	Leaf spring, nut	85±25	62.69±18.43
7	Air spring, nut	40±5	29.50±3.68

Rear suspension installation – Volvo Group VOAS Suspension 6*2 (RSI-VAS)

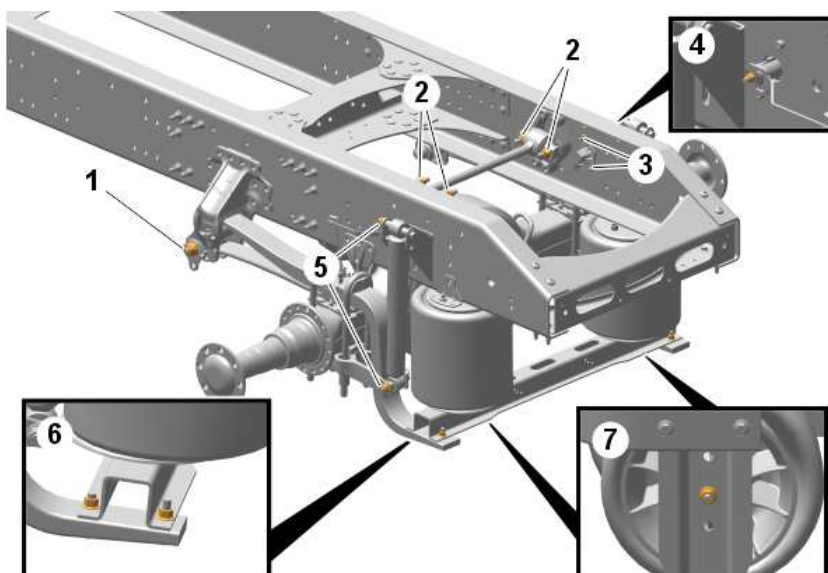


T7206625

Tightening torques

SI no.	Description	Torque in Nm	Torque in ft-lbs
1	Z leaf spring, nut	680±30	501.54±22.12
2	Reaction rod, nut	275±45	202.82±33.19
3	Level sensor, chassis, nut	24±4	17.70±2.95
4	Level sensor, arm, nut	15±3	11.06±2.21
5	Shock absorber, screw	275±45	202.82±33.19
6	Leaf spring, nut	85±25	62.69±18.43
7	Air spring, nut	40±5	29.50±3.68

Rear suspension installation – Volvo Group VOAS Suspension 6*4 (RSI-VAS)

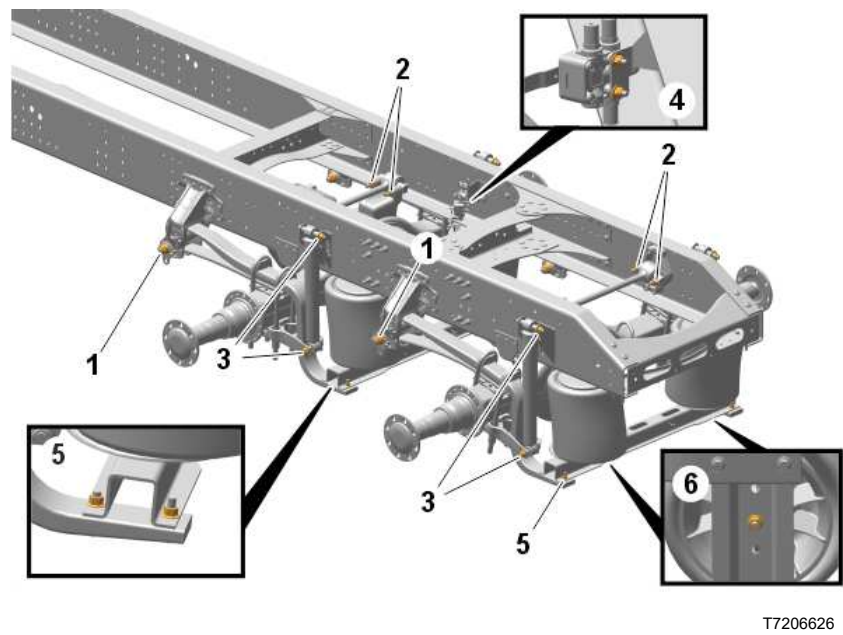


Tightening torques

SI no.	Description	Torque in Nm	Torque in ft-lbs
1	Leaf spring, nut	680±30	501.54±22.12
2	Reaction rod, nut	275±45	202.82±33.19
3	Shock absorber, screw	275±45	202.82±33.19
4	Level sensor, bracket, nut	10±2.5	7.37±1.84
5	Leaf spring, nut	85±25	62.69±18.43
6	Air spring, nut	40±5	29.50±3.68

Hendrickson HAS Suspension (RSI-HAS)

Note: Note: Use only genuine Hendrickson parts for servicing this suspension system. For service instructions, please visit: <https://www.hendrickson-intl.com/>

Rear suspension installation – Hendrickson HAS Suspension 6*4 (RSI-HAS)

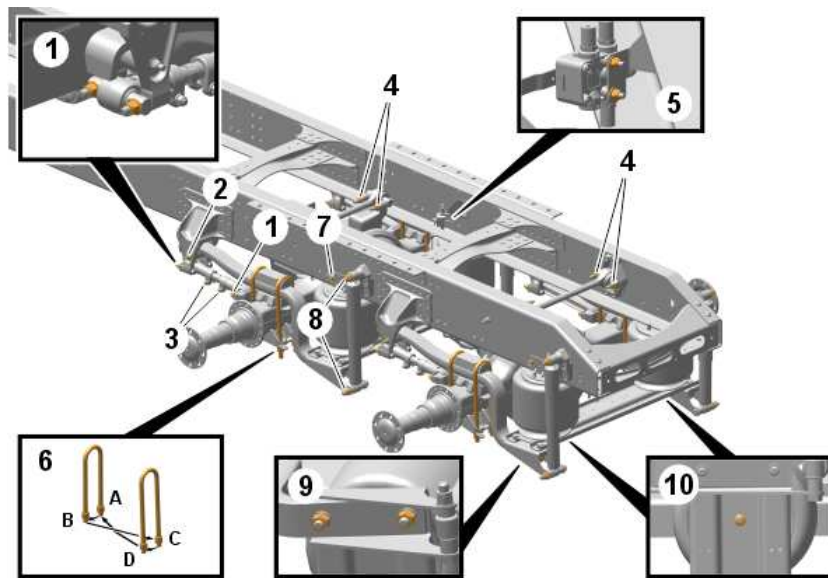


T7206627

Tightening torques

SI no.	Description	Torque in Nm	Torque in ft-lbs
1	Reaction rod, nut	275±45	202.82±33.19
2	Shackle, nut	85±15	62.69±11.06
3	Reaction rod, clamp, nut	120±20	88.50±14.75
4	Reaction rod, nut	275±45	202.82±33.19
5	Level sensor, bracket, nut	10±2.5	7.37±1.84
6	U-bolt, nut	Tightening sequence: A–D	
		575±75	424.09±55.31
7	Air bellow, nut	70±14	51.62±10.32
8	Shock absorber, nut	81±14	59.74±10.32
9	Leaf spring, nut	430±70	317.15±51.62
10	Air bellow, nut	70±14	51.62±10.32

PAM-LINK (Auxiliary Pusher Axle Manufacture, Link)

Rear Suspension Installation – PAM-LINK (Auxiliary Pusher Axle Manufacture, Link) 6*2 (RSI-VGR / RSI-VAS)

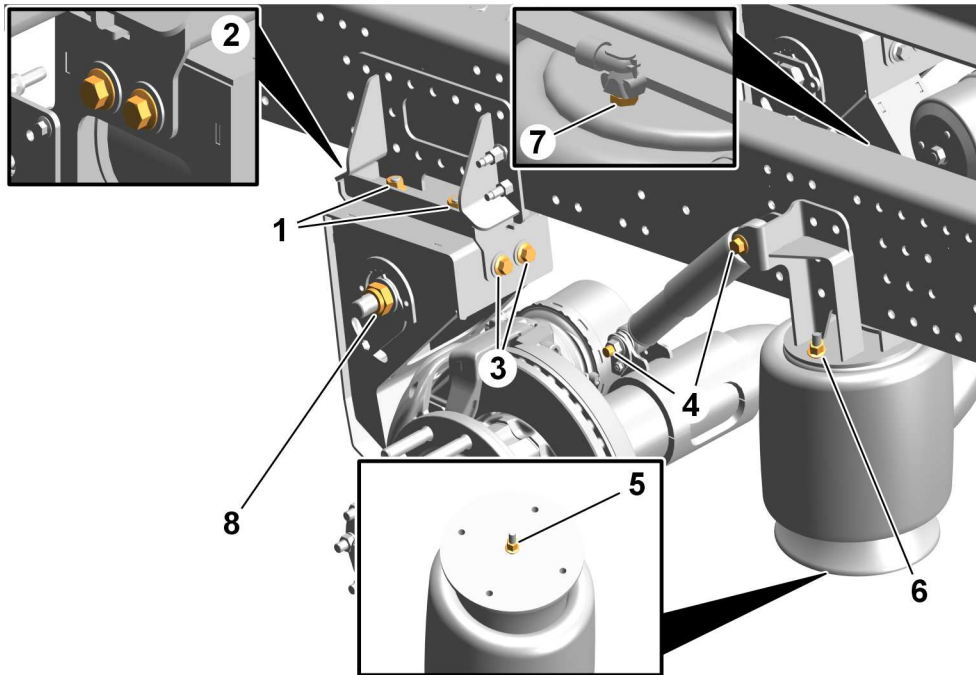

T7202298

Tightening torques

SI no.	Description	Torque in Nm	Torque in ft-lbs	Tightening sequence
1	High frame bracket, nut	305 ⁺¹⁴ ₋₃₄	255 ⁺¹⁰ ₋₂₅	1
2	High frame bracket, screw	305 ⁺¹⁴ ₋₃₄	255 ⁺¹⁰ ₋₂₅	3
3	High frame bracket, screw	305 ⁺¹⁴ ₋₃₄	255 ⁺¹⁰ ₋₂₅	2
4	Shock absorber, screw	275±45	202.82±33.19	-
5	Air spring, nut	40±5	30±3	-
6	Air spring, nut	34±7	25±5	-
7	Air spring, nut	61±7	45±5	-
8	Swing arm bolt	860±85	634±63	-

Rear Axle Literature

Printed copies of the rear axle literature are no longer available from the axle suppliers. Therefore, Volvo Trucks North America is unable to supply this printed literature to its dealers.

Service manuals for many of the supplier’s rear axles are now available from the official web sites Dana Corporation and Meritor.

To review and download rear axle literature, please visit:

<https://www.dana.com/resource-library/>
www.meritor.com/LOD

Notes

V O L V O

Volvo Trucks North America

<http://www.volvotrucks.com>